

Baldwin™-Series 8210D Digital Cooler

New Digital Control System, Same Reliable Performance

The new Baldwin™-Series digital 8210D thermo-electric coolers by Perma Pure are a powerful combination of the proven track record of Baldwin™-Series classic coolers with a new digital control system. This combination ensures reliable performance for high flow rate, high ambient temperature, and high water volume applications.

Key Features

- Reliable dedicated Digital Control System keeps your system operating efficiently
- Advanced P.I.D. control algorithm increases temperature control precision to maintain analysis accuracy
- Continuous display of temperature eliminates guess work – a quick look tells it all
- Alarm outputs provide alarm interface capability for your data acquisition system as well as direct control of sample pumps
- Configurable for simple control of multiple sample streams
- Individual water slip sensors and alarm outputs safeguard against upset conditions
- Gas stream temperature output allows direct monitoring, eliminating guess-work
- 115 or 230 VAC models
- Coming Soon – MODBUS for remote monitoring

All Baldwin™-Series coolers use thermo-electric elements (Peltiers) to cool the sample gas to the desired dew point temperature. Condensate can be removed as it forms by an available peristaltic pump.


All Baldwin™-Series coolers include:

- Dependable water removal
- Low maintenance
- Single or dual sample streams
- Alarm relays protect analyzers
- EZ-Clean twist-apart impingers (Optional)
- Durinert coated impingers (Optional)



Standard Capacity from 4 to 10 LPM

Model	Standard Capacity	Impingers		Dimensions (H x W x D)	Weight
		Passive	Active		
8210D	4-10 LPM (8.5-21.2 SCFH)	—	2 x 10 in	15 x 13 x 12 in (38 x 33 x 30 cm)	38 lbs (18 kg)

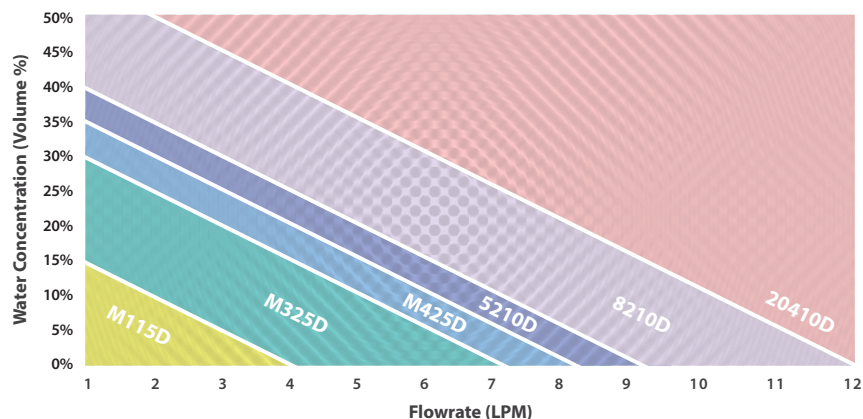

Intelligent Product Numbering System

Follow the below 5 steps to determine your product number.

Step 1: Select Model (Required)	
8210D	4C-8210D
20410D	4C-20410D
Step 2: Select Voltage (Required)	
115 VAC, 50/60 Hz	1A
230 VAC, 50 Hz	2A
Step 3: Select Impingers (Required)	
10" Stainless Steel, EZ Clean Twist-Apart Impingers	ES
10" Glass Impingers, threaded with fittings	G
10" Kynar Impingers	K
10" Stainless-Durinert coated, EZ Clean Twist-Apart Impingers	ED
Step 4: Select NJ Thermocouple Option (Stainless Steel and Stainless-Durinert Coated Impingers Only)	
New Jersey thermocouple temperature sensor, series configuration	T1
New Jersey thermocouple temperature sensor, parallel configuration	T2
Step 5: Select Water Slip Sensor Option	
Water slip sensor with inline flow holder; 1/4" Kynar tube fittings	WS
Water slip sensors with inline flow holder; 1/4" Kynar tube fittings, parallel configuration	WP

Example Product Number

4C-8210D	1A	ES	T1	WS
Cooler	Voltage	Impingers	NJ Thermocouple	Water Sensor

Perma Pure LLC • A Halma Company • info@permapure.com • www.permapure.com

1001 New Hampshire Ave., Lakewood, NJ 08701 USA

Lit. No.: 8210D-Flyer-1810 Supersedes: 8210D-Flyer-1802

©2018 Perma Pure LLC. All rights reserved. Specifications subject to change.

Nafion™ is a registered trademark of The Chemours Company.