


## Baldwin™-Series Water Slip

# Sample Conditioning System

## Water Slip (Moisture Carry-Over Sensor) Assembly

The Baldwin™-Series water slip sensor is designed to provide gas sample pump shut down to protect analyzers in the event of water slipping past the thermo-electric cooler. The water slip assembly includes a sensor with Hastelloy® pins (3CWS-001), water slip holder (3CWS-002), holding pin and retainer chain. This contact sensor is used in the Baldwin-Series gas conditioning systems with thermo-electric coolers with relay/alarm capabilities.

*(right) Water Slip Sensor 3KCW-002*

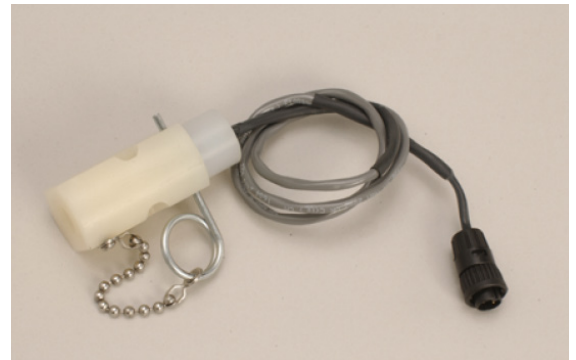

Inert PVDF material is used in constructing the water slip sensor to prevent absorption of relevant gases. The water slip sensor is often used in conjunction with the Baldwin™-Series in-line sample filter assembly (3KFA-001), which is used on all Wall/Rack mounted and Testers' Choice portable sample conditioning systems to provide fine particulate filtration.

### Includes

- PVDF Filter Head
- O-Ring
- Mounting Bracket
- Locking Ring
- Borosilicate Glass Bowl
- 2-Micron Ceramic Filter Element (Standard)

*(left) Water Slip Sensor 3KCW-002*

*Shown with in-line filter assembly p/n 3KFA-001*